



KD1450 DOUBLE ANHYDROUS GEAR



Specifications:

- 5th Wheel Style Steering
- 60" front track standard
- 102" rear track adjustable to 120"
- 385/65-22.5 tires on 8 bolt rims (8,000# capacity)
- Heavy duty adjustable tongue, spring assisted for easy hook-up
- 32,000 lbs. G.V.W. rating
- Dual safety chains
- Standard lighting includes brake lights, tail lights, and turn signals




Elevated slip resistant platform with handrails allows easy access to both valves.



Universal tank mount:
*Heavy duty formed plate will accommodate the following tanks:

2-1,000 gallon	1-2,000 gallon
2-1,450 gallon	1-3,000 gallon

*New tanks with standard hole pattern

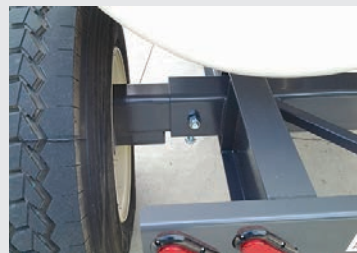

Standard adjustable rear axle from 102" to 120" includes tension bolts on bottom of tube for extra reinforcement.



Extra heavy duty gooseneck with protected open hose inspection area.

KD1450 - The most universal, user friendly, anhydrous gear available.

www.koryfarm.com